

5-Channel Remote Control Switch Receiver Module. (Sound Control)

NC-ARSR Ver 7.0

Related Products : NC-ARST (5-Channel Remote Control Switch Transmitter Module)



1. 5-Channal Remote Control Switch Receiver Module.

- * NC-ARSR is a Remote Control Receiver module to Wire Communication Device wireless Communication devices.
- * You can remote control with Long-Distance By Radio (Walky-talky) or Telephone (Intercom).
- * It can remote control Country To Country if Connected by Telephone or Mobile Phone.
- * It can remote Control if it is available distance position to Voice Communication.
- * It is mounted Communication-Chip on NC-ARSR.


2. Applications & Features.

- . ON/OFF Switch System with Max 5-Channel.
- . Remote Control System with Long Distance. (By Radio (Walky-talky))
- . It is possible to use the world. (by Telephone or Mobile Phone.)
- . It can use a variety like CCTV, crane, remote switch etc.
- . Fast and accurate audio chip is used.
- . Developed in the form of module, it is conveniently applicable to your products.

3. 5-Channal Remote Control Switch Receiver Module Specification.

| Item | Specification |
|--------------------------------|---|
| Operating voltage | DC 5V |
| Operating Current | stand by : under 20mA Relay work : under 120mA |
| Maximum Controllable Channels | 5 channels |
| Relay Output mode. | Latch Mode Continues Mode |
| Relay Contact | Under AC 220V – 1A |
| Modulation / Demodulation mode | AFSK |

4. 5-Channal Remote Control Switch Receiver Module Information.

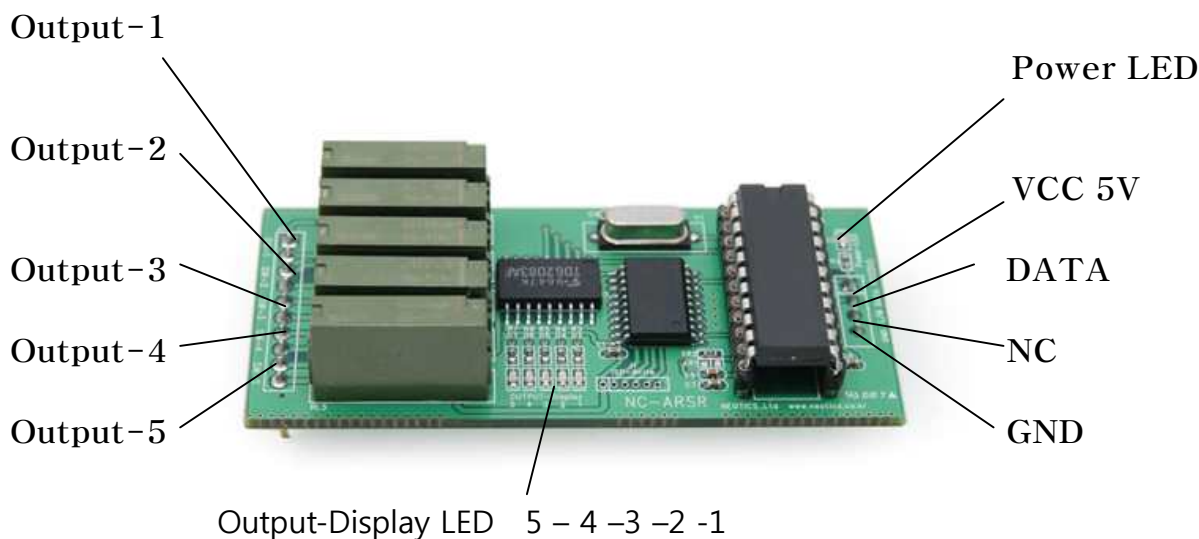


- * Output -1 : Output Relay On/Off – 1. (Use the 2 Header Pin)
- * Output -2 : Output Relay On/Off – 2. (Use the 2 Header Pin)
- * Output -3 : Output Relay On/Off – 3. (Use the 2 Header Pin)
- * Output -4 : Output Relay On/Off – 4. (Use the 2 Header Pin)
- * Output -5 : Output Relay On/Off – 5. (Use the 2 Header Pin)
- * Power LED : Power LED Displayed .
- * VCC 5V : Input Power DC 5V(+) .
- * DATA : NC-ARST Sound input terminal .
- * NC : When you need to set the Relay Output mode.
User Select (Latch Mode : GND, Continues Mode : VCC or Open).
- * GND : Input Power DC 5V(-).

** Device Connection..... (NC-ARST Sound)

- . Data Audio Speaker Line from Telephone or Radio (Walky-Talky) or Mobile Phone
- . GND Line from Speaker GND Device.

5. 5-Channel Remote Control Switch Receiver Module Size.

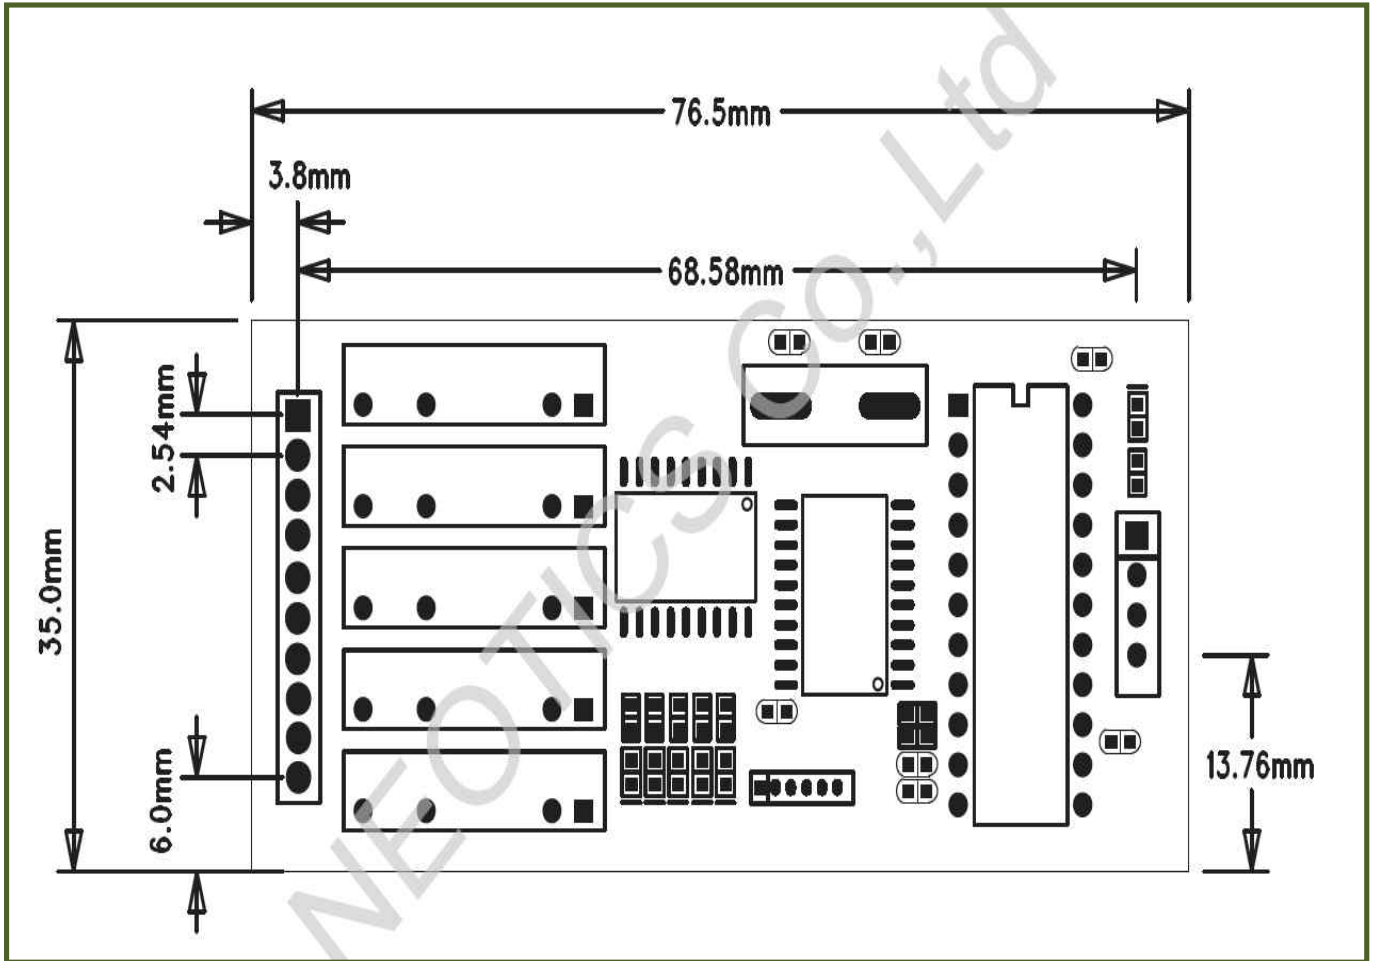

***** Caution*****

1. Check the features first to connect with other equipment.
2. This circuit is strictly tested.
3. The developer, manufacturer or dealer is not responsible for any malfunctioning/damage caused by connection with other equipment.
4. Appropriate permit /approval is required for some products utilizing this module, depending on functions and usages.

- For more information and inquiry, please refer to the sites below.